




### Features

- SAF·T·FLO retractable injection quills are engineered for safety and reliability.
- Retractable feature allows operators to safely remove and insert the injection quill, while under pressure, up to 150 psi.
- These high quality injection quills are optimal for injecting a chemical solution into a pressurized water main or process piping system.
- No shutdown of the water main or process piping system is required.

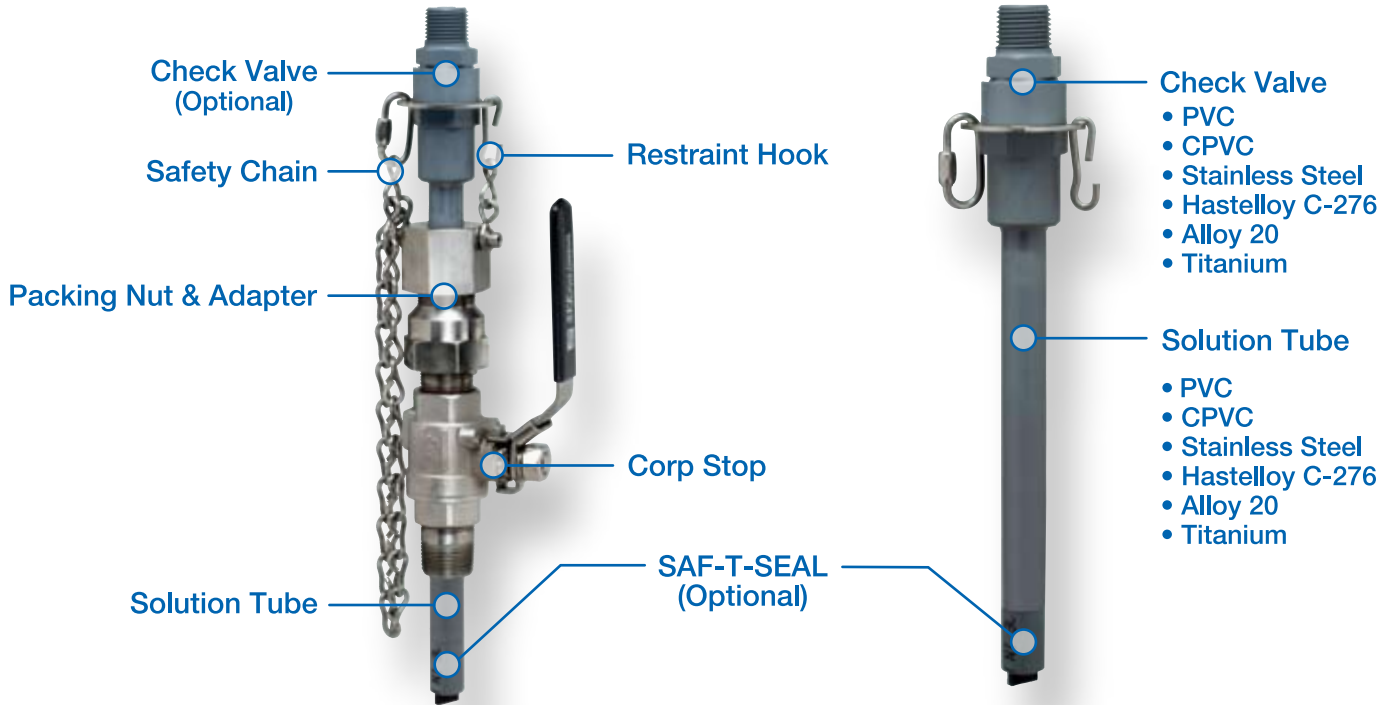

Main Connection Size	Material of Construction	Solution Tube Diameter	Max. Length	Check Valve Available	Saf-T-Seal Tip Available	Base Model Number
3/4" NPT or AWWA	Brass	3/8"	6"	n/a	Yes	EB-130
3/4" NPT or AWWA	Brass	3/8"	6"	Standard	Yes	EB-145
3/4" NPT	SS	3/8"	6"	n/a	Yes	EB-130
3/4" NPT	SS	3/8"	6"	Standard	Yes	EB-145
1" NPT or AWWA	Brass	1/2"	6"	n/a	Yes	EB-132
1" NPT or AWWA	Brass	1/2"	6"	Standard	Yes	EB-146
1" NPT	SS	1/2"	6"	n/a	Yes	EB-132
1" NPT	SS	1/2"	6"	Standard	Yes	EB-146
1-1/4" NPT or AWWA	Brass	3/4"	8"	Optional	n/a	EB-191
1-1/2" NPT or AWWA	Brass	1"	10"	Optional	n/a	EB-159
2" NPT or AWWA	Brass	1-1/2"	12"	Optional	n/a	EB-160

Standard unit includes; brass corp. stop, 6 inch PVC solution tube with plain tip, stainless steel limit chain, and stainless steel restraint system.

### Features

- Brass Corporation Stop or Stainless Steel Ball Valve
- Stainless Steel Restraint Hook
- Preset Stainless Steel Limit Chain
- Tip Configuration
  1. Plain Tip
  2. Bevel Tip with Alignment Arrow
  3. SAF-T-SEAL
- Diffuser (Optional)
- Check Valve (Optional)
- Lengths Over 6 Inches

### Maintenance

- Periodically remove solution tube to check for internal or exterior chemical build-up
- Apply grease to the compression o-ring
- Re-apply Anti-Seize to Packing Nut & Adapter threads

### Other Saf-T-Flo Models

- 250 psi. rated Retractable Injection Quills
- Non-Retractable Injection Quills
- Retractable Flanged Injectors
- Chemical Injection Spools
- Sampling Probes



Please contact our Asia Pacific distributor:

# H2O Rx

Phone: 0409 784 236 or 0421 795 353

info@h2orx.com.au

[www.h2orx.com.au](http://www.h2orx.com.au)