


# EB-111

## Injection Quill, Non-Retractable, Basic 3/4" MNPT x 1/2" Solution Tube



### SPECIFICATIONS

SAFETY RATING	1500 psi - PVC, CPVC, PVDF 1500 psi - Alloy
CHECK VALVE	NO
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	NO
VALVE/PROCESS CONNECTION SIZE	3/4" MNPT
INLET CONNECTION SIZE	3/4" MNPT
SOLUTION TUBE SIZE	1/2"
SOLUTION TUBE ID (PVC, CPVC, & SAF-T-SEAL ALLOY)	0.546"
SOLUTION TUBE ID (NON-SAF-T-SEAL ALLOY)	0.622"
SOLUTION TUBE OD (ALL)	0.824"
(A) OPERATING LENGTH	2.50"

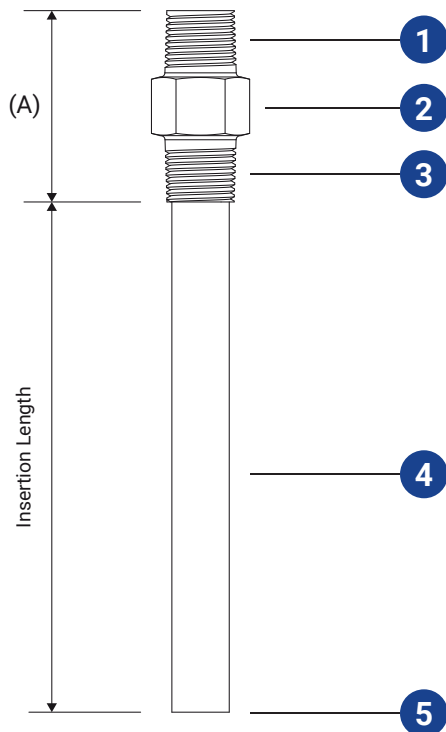

### ORDERING INFORMATION

#### PVC and CPVC

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	P = PVC C = CPVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

#### PVDF

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	K = PVDF	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel

#### ALLOY

SERIES	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION
EB-111	<input type="text"/>	<input type="text"/>	<input type="text"/>
	H = HASTELLOY C276 S = 316SS A = Alloy 20	2 = 2" 4 = 4" 6 = 6" 8 = 8" 10 = 10" 12 = 12" 18 = 18" 24 = 24"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM

- 1 Inlet Connection Thread
- 2 Installation Hex
- 3 Main Connection Thread
- 4 Solution Tube
- 5 Tip

