


# EB-125



## Standard Service Retractable Injection Quill 3/4" Valve x 3/8" Tube with Integrated Check Valve and Quick Disconnect

### SPECIFICATIONS

SAFETY RATING	150 PSI
CHECK VALVE	INTEGRATED SPRING LOADED BALL CHECK
SAF-T-SEAL TIP	OPTIONAL
QUICK DISCONNECT	YES
VALVE/PROCESS CONNECTION SIZE	3/4" MNPT
INLET CONNECTION SIZE	1/2" MNPT
SOLUTION TUBE SIZE	3/8"
SOLUTION TUBE ID	0.423"
SOLUTION TUBE OD	0.675"
(A) OPERATING HEIGHT	14.25" - BRASS 15" - STAINLESS STEEL
(B) VALVE/GLAND LENGTH	6.5" - BRASS 7.25" - STAINLESS STEEL
EXTRACTION LENGTH	A + B + INSERTION LENGTH

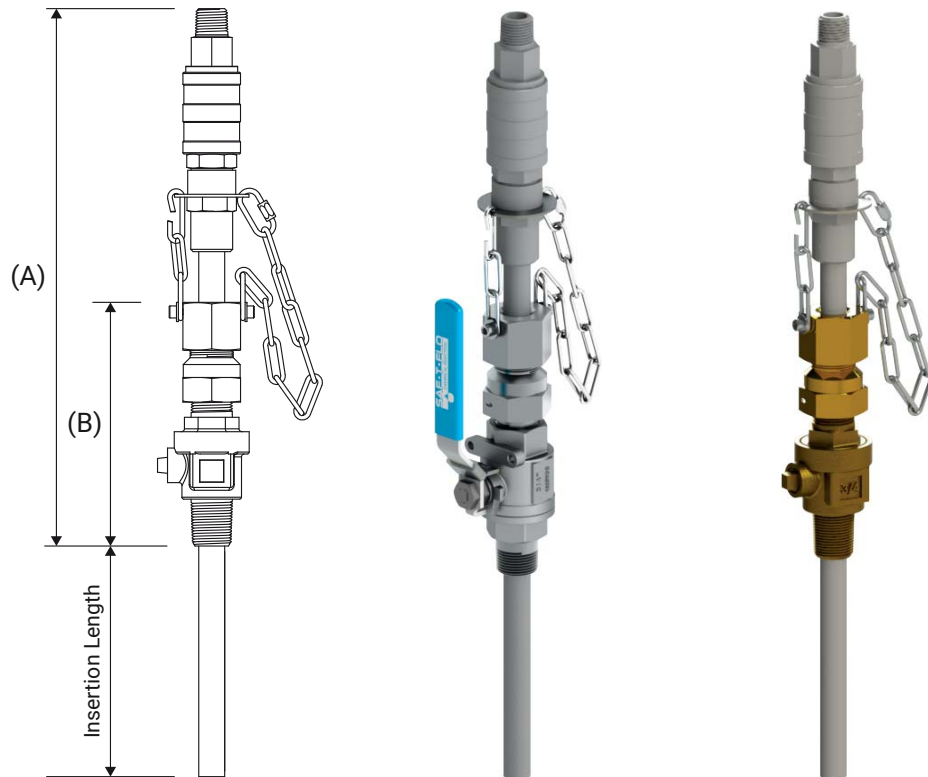

### ORDERING INFORMATION

SERIES	VALVE MATERIAL	SOLUTION TUBE MATERIAL	INSERTION LENGTH	TIP CONFIGURATION	CHECK VALVE SEAL
EB-125	-	-	-	-	-
	B = Brass S = Stainless Steel	P = PVC	2 = 2" 4 = 4" 6 = 6"	0 = Standard B = 45° Bevel CV = SAF-T-Seal, FKM CE = SAF-T-Seal, EPDM	V = FKM E = EPDM

### TECH NOTES

- Check valve spring cracking pressure is 10 psi.
- Main connection thread type is NPT by default. CC (AWWA) also available. Consult factory for details.
- Maximum insertion length for 3/8" PVC solution tubes is 6". PVC solution tubes are not covered by warranty when used in process flows with velocities 6 fps or greater.

